

RINKO & ASSOCIATES, LLC

Materials Chemistry

July 28, 2011

Fellert North America
3411 Brinkerhoff Road
Kansas City, KS 66115

Attn: Mr. Sandy Andrew

Ref: Lab File # RA-0625-1A-11B

1. SAMPLE(S):

One (1) section of Ultra Finish Fellert White 06/06/11

2. ANALYSIS PERFORMED:

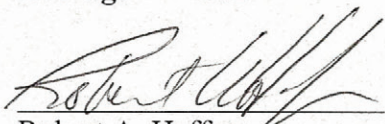
ASTM E761-92- Test Method for Compressive Strength of Sprayed Fire-Resistive Material applied to Structural Members

ASTM E605-93- Test Method for Thickness and Density of Sprayed Fire-Resistive Material (SFRM) Applied to Structural Members

3. RESULTS:

Sample : Ultra Finish Fellert White 06/06/11

ASTM E761-92	ASTM E605-93
<u>Compressive Strength (psi)</u>	<u>Density (lbs/ft²)</u>
1. 149	1.83
2. 153	1.83
3. 153	1.83
<hr/>	<hr/>
Average 152	1.83


Robert A. Haffner,
Chief Analytical Chemist/Engineer